

Trueconnect™ LOW PIM LOAD TRAY



MODEL - TL50/RM/43F/LP




Low PIM 50 Watt Termination Load Tray

DESCRIPTION:

The 19" rack mount low PIM load tray can be used when rack space is at a premium. 8 X 50W low PIM loads are in a small package that saves rack space. Connections are easily made using low PIM jumper assemblies

| Specifications | |
|--|-------------------------------------|
| Frequency Range (MHz) | 30-3000 |
| VSWR | ≤1.20:1 |
| Power Rating (W) | 50 |
| Temperature Range F @ | -25 to +125 (-30 to +50) |
| Intermodulation dBc (2x43 dBm carrier) | ≤-168 |
| Impedance (Ω) | 50 |
| Environmental Humidity | 5-97% |
| Dimensions in (mm) | 19 X 7.87 X 3.47 (482.6 X 200 X 88) |
| Connectors | 8 X 4.3/10 Female |
| Mounting | 19" rack |

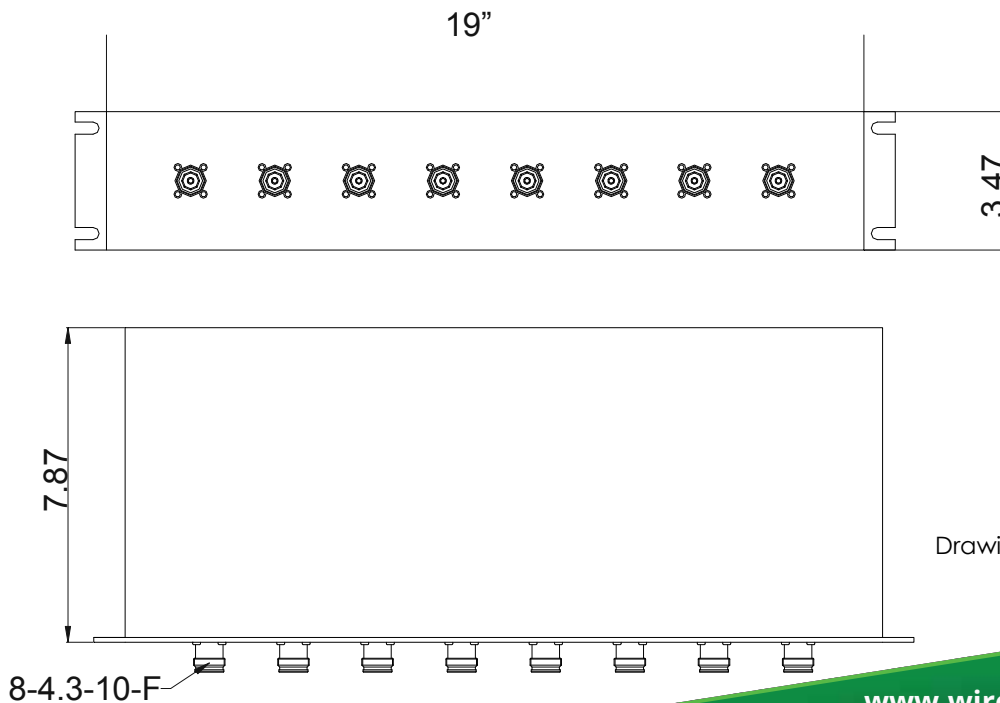

Drawing is for reference only

www.wirelessupply.com

© 2019 All rights reserved. Proprietary information. Wireless Supply reserves the right to modify or amend specifications without prior notice